


	MM
A Total Width	
B Fixing Bracket Width	
C Maximum Fixing Bolt Diameter	7.0
D Maximum PCD	365
E Minimum PCD	349
F Fan blade diameter	240
G Basket outer diameter	325
I Basket depth	60
J Junction box protrusion	60
K Fan blade/motor protrusion	30
L Overall depth	75

All measurements shown are in millimeters  
 Measurements shown have manufacturing tolerances of +/- 2mm

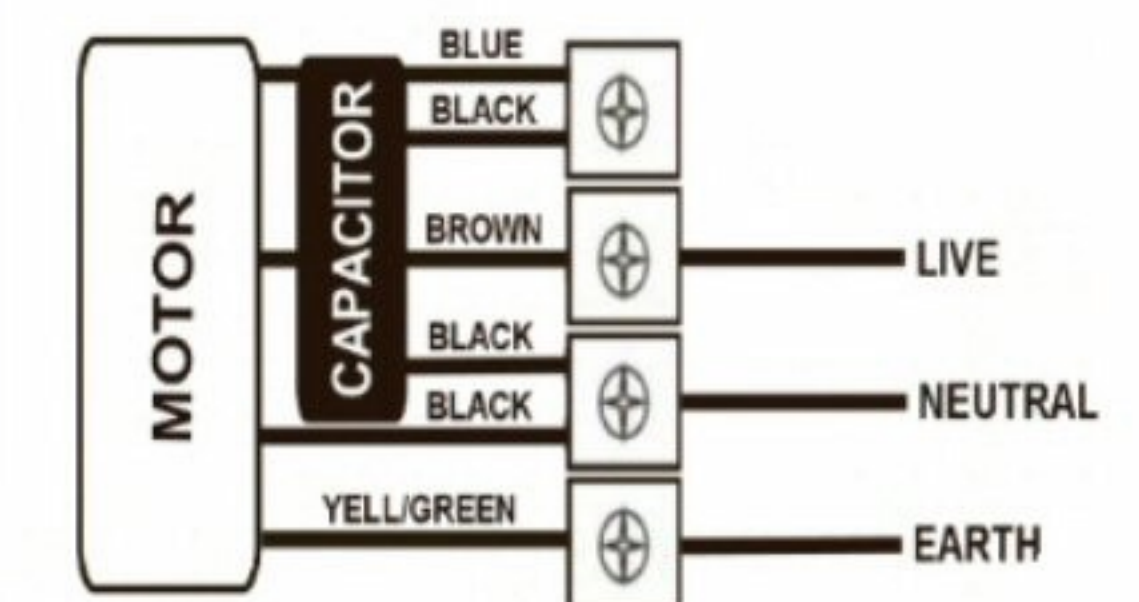

SPECIFICATION					
Motor	PSC	Speed (RPM)	2650/2880	Bearings	Ball
Voltage (V)	220	Motor Protection	Th. Prot.	Weight (Kg)	2.8
Frequency (Hz)	50/60	Insulation Class	B	Air Volume (M <sup>3</sup> /h)	1580/1650
Power In/Out (W)	95/115	Protection Class	IP54	Noise Level (dBA)	68/70
Current (A)	0.41/0.57	Temp. Range	-30 +60	Capacitor (MF)	4.0

**POLE STAR**  
 PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	<b>GMA1-240S-1E-1</b>
Projection	A4
Angle	Scale:
± 3°	Sheet: 1 of