


WIRING VIEWED FROM THE SHAFT END

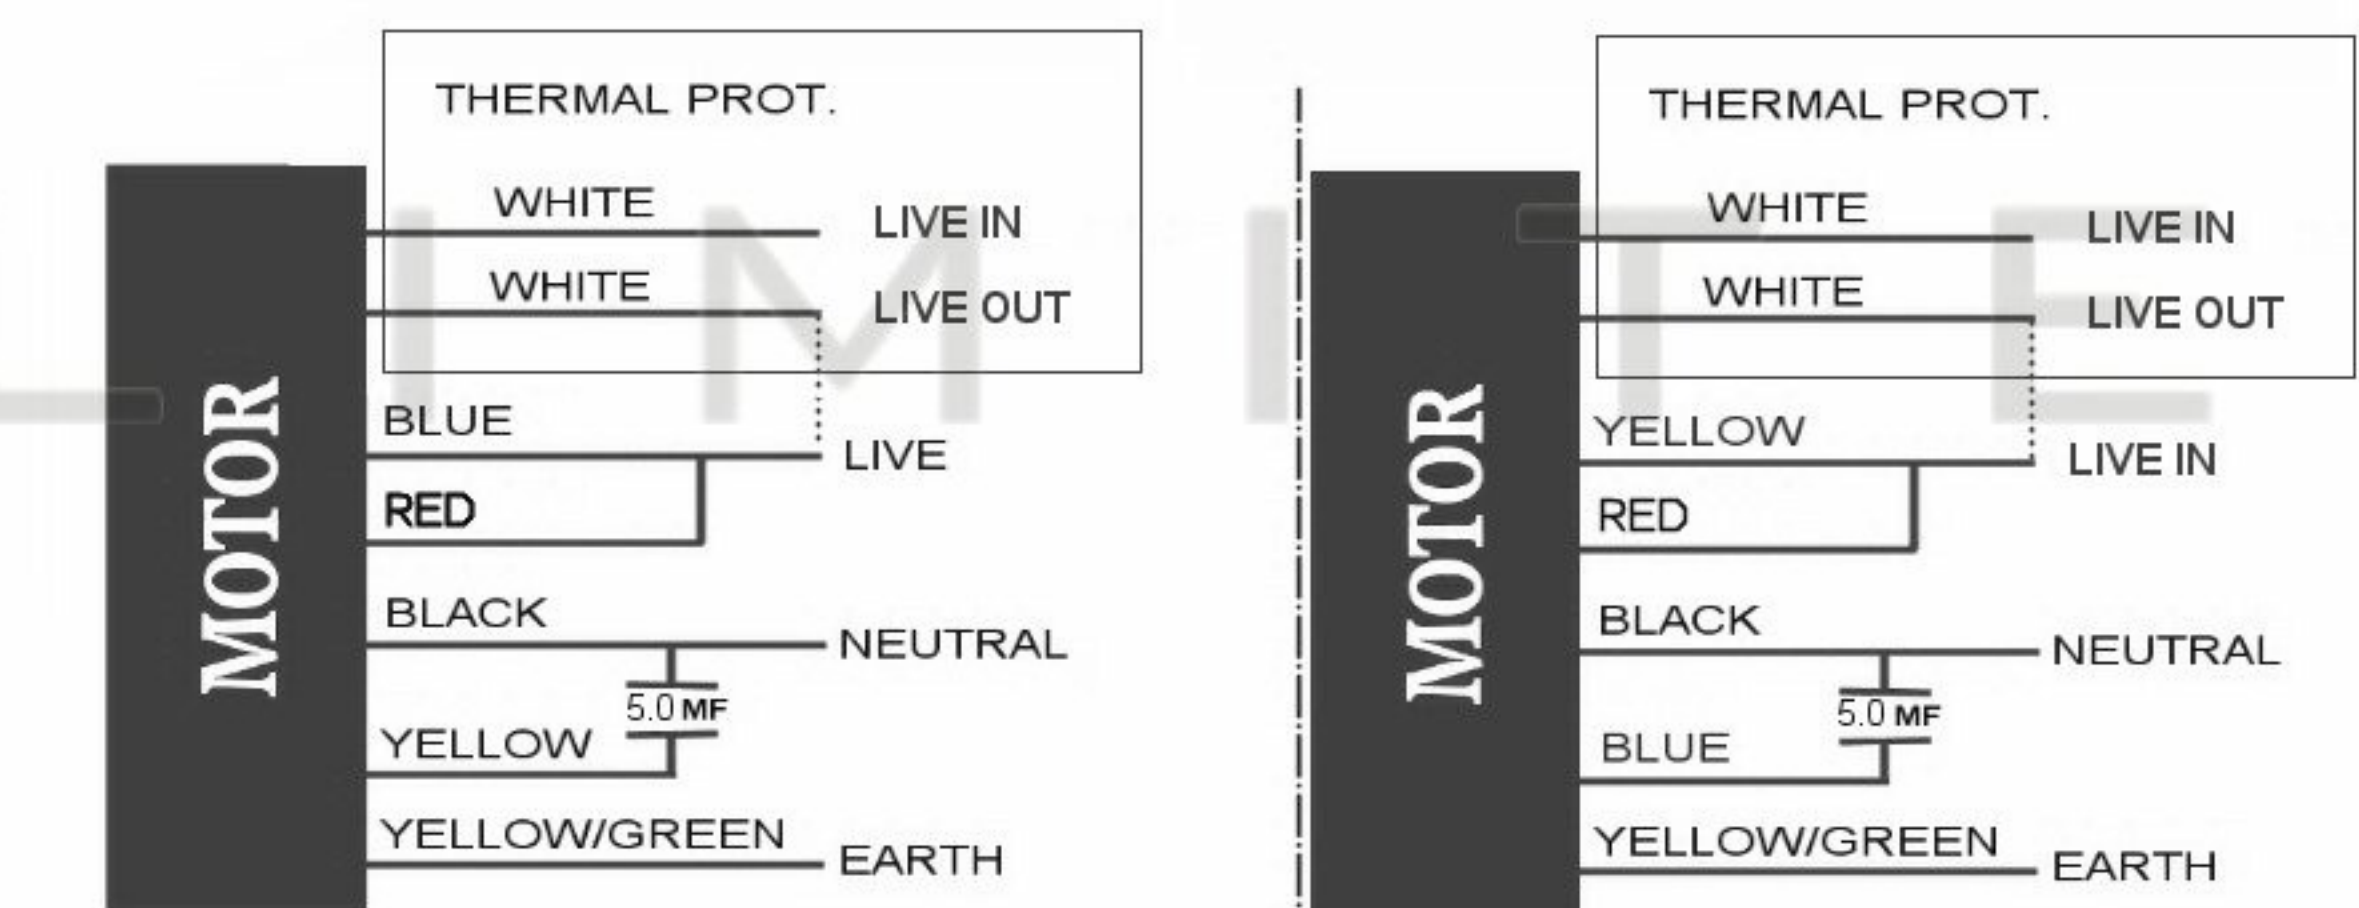

CW ROTATION

ACW ROTATION

TO CHANGE ROTATION INTERCHANGE THE YELLOW & BLUE LEADS

THERMAL PROTECTION: An optional thermal protector is fitted to the white leads. If required please install as above. Isolate cables if not used.

SPECIFICATION					
Motor	PSC	Speed (RPM)	1300	Bearings	BALL
Voltage (V)	230	Motor Protection	Th. Prot.	Weight (Kg)	
Frequency (Hz)	50/60	Insulation Class	B	Air Volume (M <sup>3</sup> /h)	
Power In/Out (W)	200	Protection Class	IP22	Noise Level (dBA)	
Current (A)	1.7	Capacitor (Mf)	5.0	Pressure (Pa)	

**POLE STAR**  
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	<b>DD10/10-F200/1V-1</b>
Projection Angle	± 3°
Scale:	A4
Sheet:	1 of 1