

SIGNAL	COLOR	SPEC	SIGNAL	COLOR	SPEC
L1	BLACK	AC380V 50/60Hz	Vcc	RED	DC10V
L2	BLACK	AC380V 50/60Hz	Vsp	YELLOW	0-10VDC/PWM
L3	BLACK	AC380V 50/60Hz	GND	BLUE	GND
PE	YELLOW/GREEN	EARTH	FG	WHITE	12 Pulse/R



SPECIFICATION	$\Delta/Y$				
Motor	3ph	Speed (RPM)	1600	Bearings	Ball
Voltage (V)	380	Motor Protection	Th. Prot	Weight (Kg)	
Frequency (Hz)	50	Insulation Class	B	Air Volume (M <sup>3</sup> /h)	
Power In/Out (W)	950	Protection Class	IP54	Noise Level (dBA)	
Current (A)	1.6	Temp. Range	-40°C + 65°C		


All measurements shown in mm

POLE STAR PRODUCTS LIMITED

Product Code  
**PMA3-500S-EC**

**POLE STAR**  
PRODUCTS LIMITED

Projection  
Angle  
 $\pm 3^\circ$

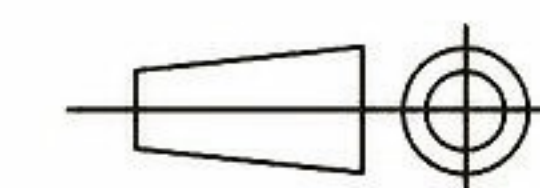

A4  
Scale:  
Sheet: 1 of