


Airflow Direction

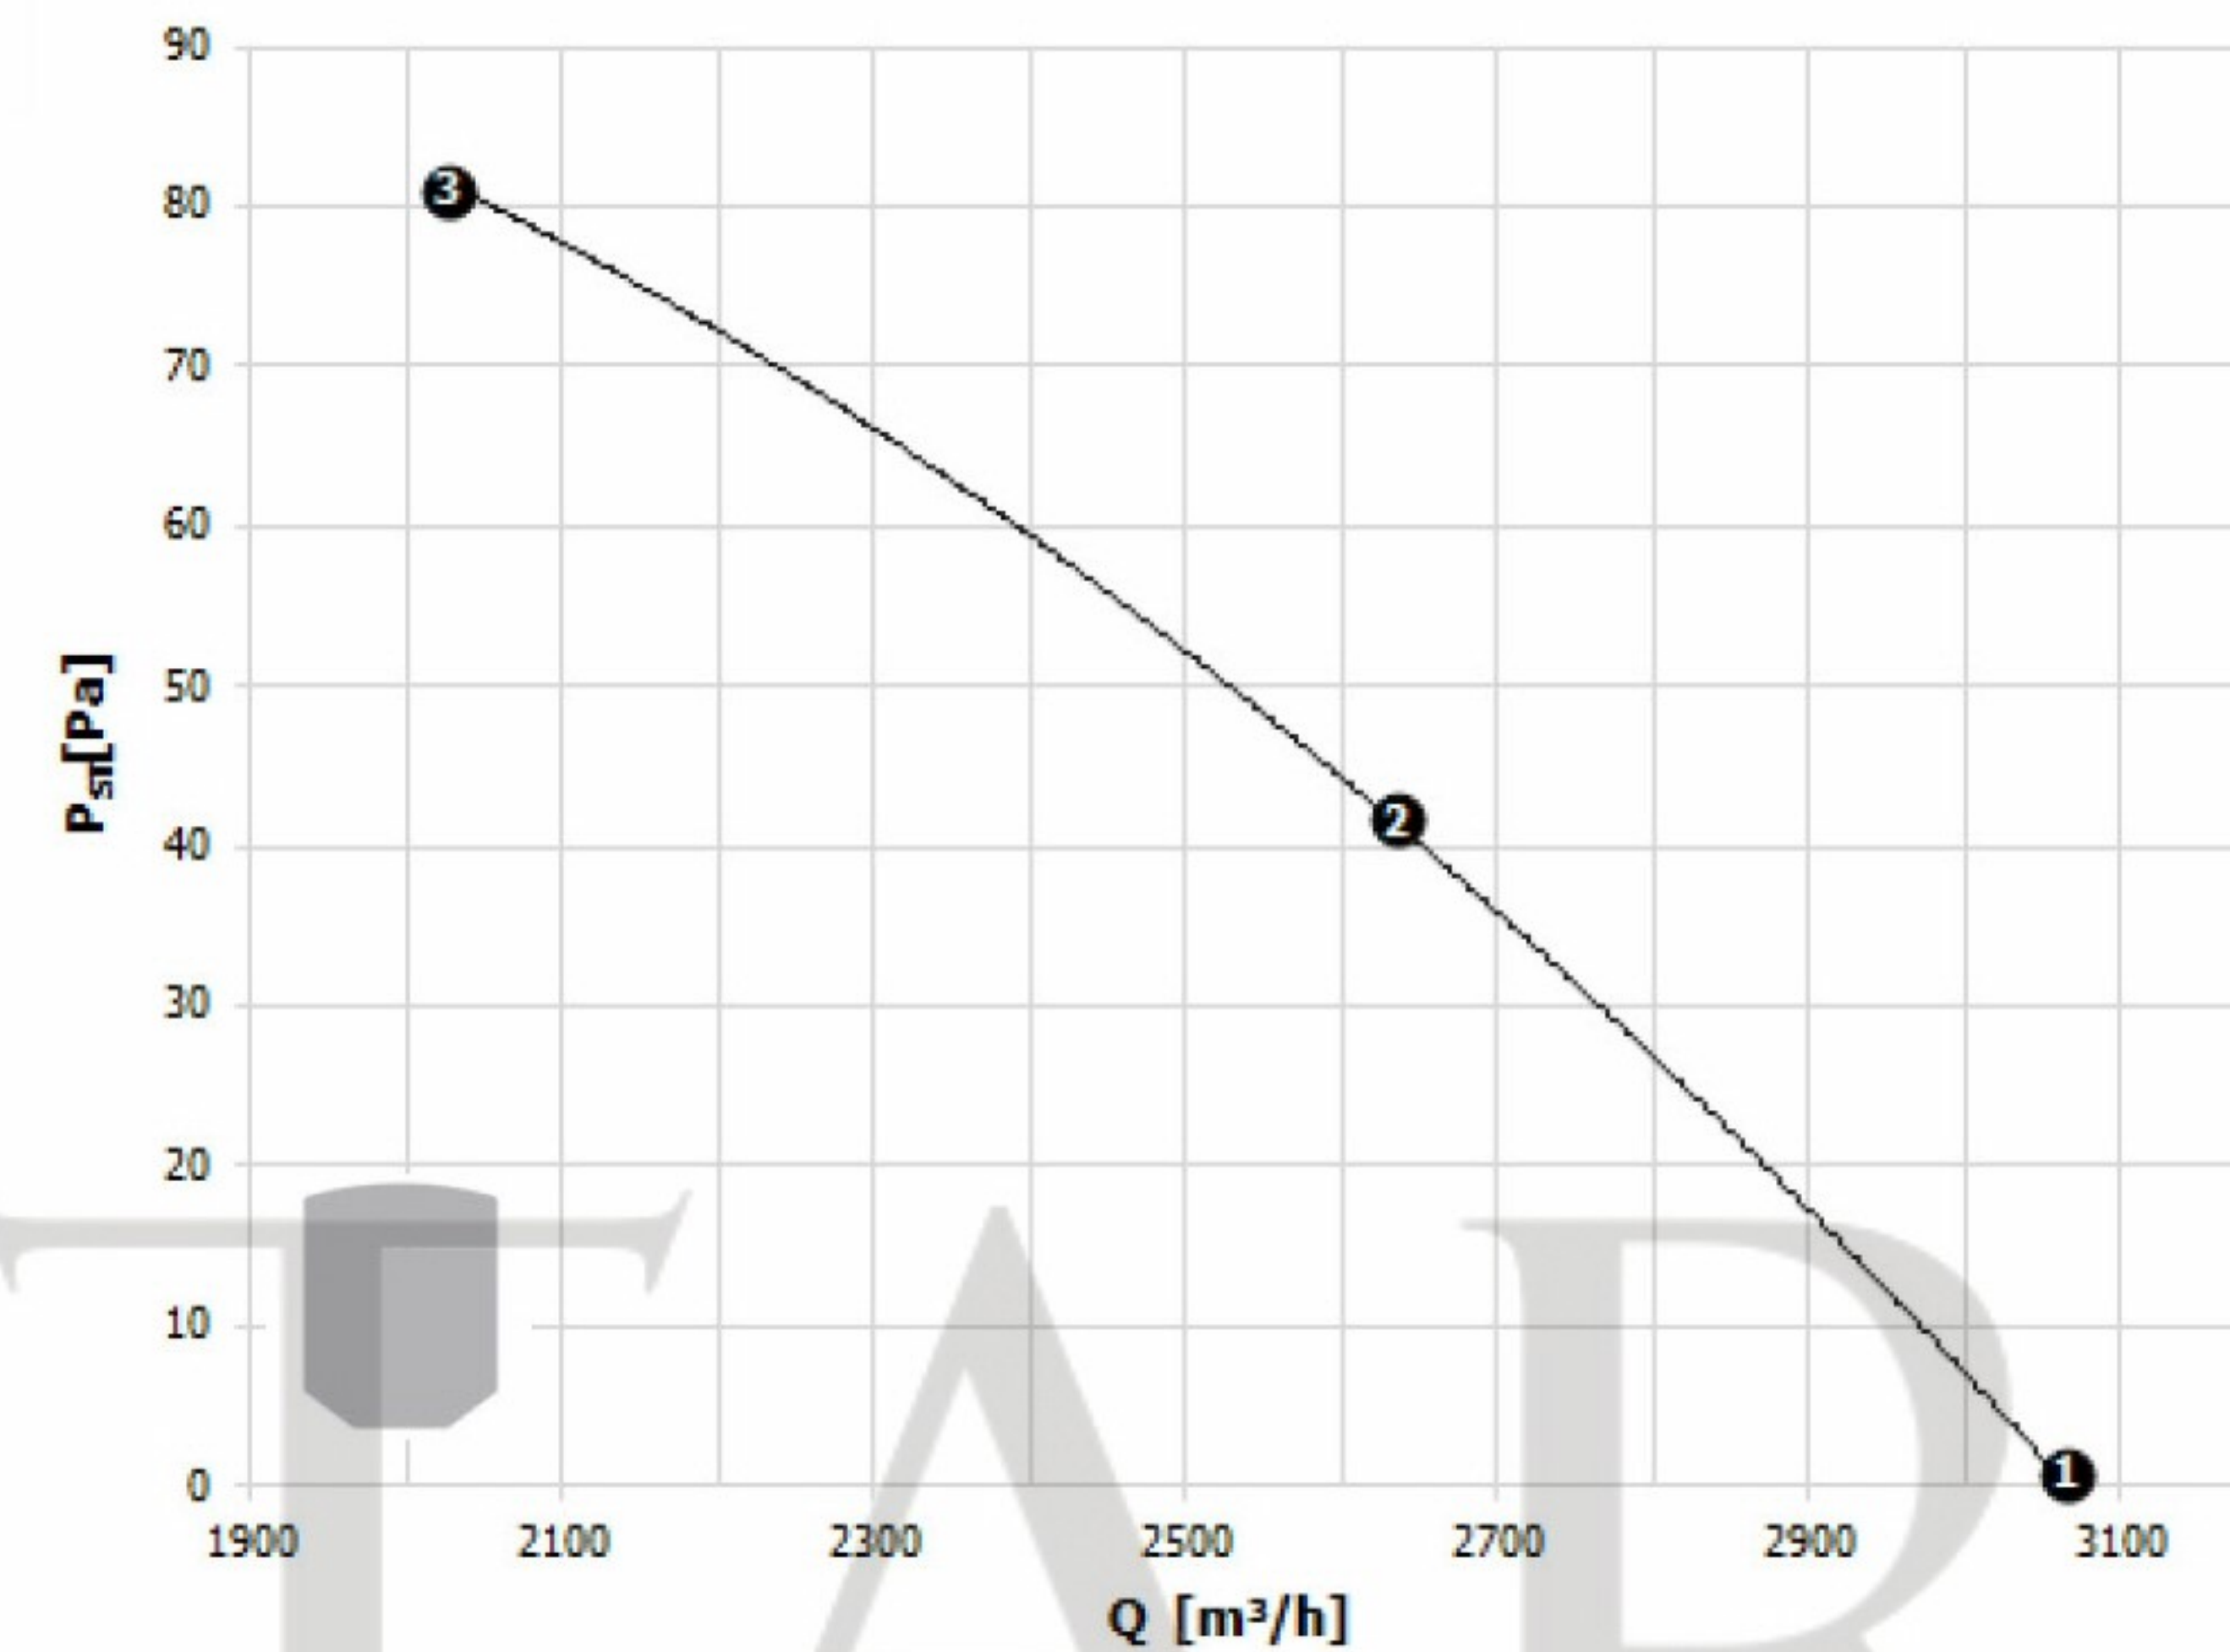

	N	Abs. Pw	I	Lpa 3 m
	[RPM]	[kW]	[A]	[dB(A)]
(1)	1399	0,14	0,799	60.5
(2)	1386	0,16	0,79	57.5
(3)	1380	0,17	0,79	57.5

Air performance obtained in compliance with AMCA 210 and ISO 5801, Installation A category in VIP full nozzle and without guard grill.

Sound power levels and sound energy levels determined in accordance with ISO 3744. The uncertainty conforms to ISO 12001, accuracy grade 2.

Standard operating condition
 Continuous duty - S1
 International protection IP 55
 Voltage and frequency range in compliance with IEC 60034-1

ERP 2015
 $\eta_{A,Stat}$ 28,8 % Efficiency grade 28,6 %

Description	Part Number	□ L0	□ L1	ØD0	ØD1	H0	H1	H2	H3	Motor Frame	Kg
UH 035-36-4M-P-0X06Y-A	1400067	450	400	356	390	276	32	62	15	63 B14	5.5

Optimum energy Efficiency point	Input Power 0,155 Kw	Pressure 75 Pa
	Air Flow 2136 m3/h	RPM 1387 RPM

SPECIFICATION					
Motor	PSC	Speed (RPM)	1387	Bearings	Ball
Voltage (V)	230	Motor Protection	Th.Prot.	Weight (Kg)	5.5
Frequency (Hz)	50	Insulation Class	F	Noise dB(A)	57.5
Power In/Out (W)	180	Protection Class	IP55	Amb. Operation	-15 ~ +60
Current (A)	1.66	Capacitor (MF)	12	Max Op. Range	81

POLE STAR
 PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	PMAHD1-350B4-1
Projection Angle	± 3°
	A4
	Scale:
	Sheet: 1 of