


Lead length: 1000

AIRFLOW DIRECTION

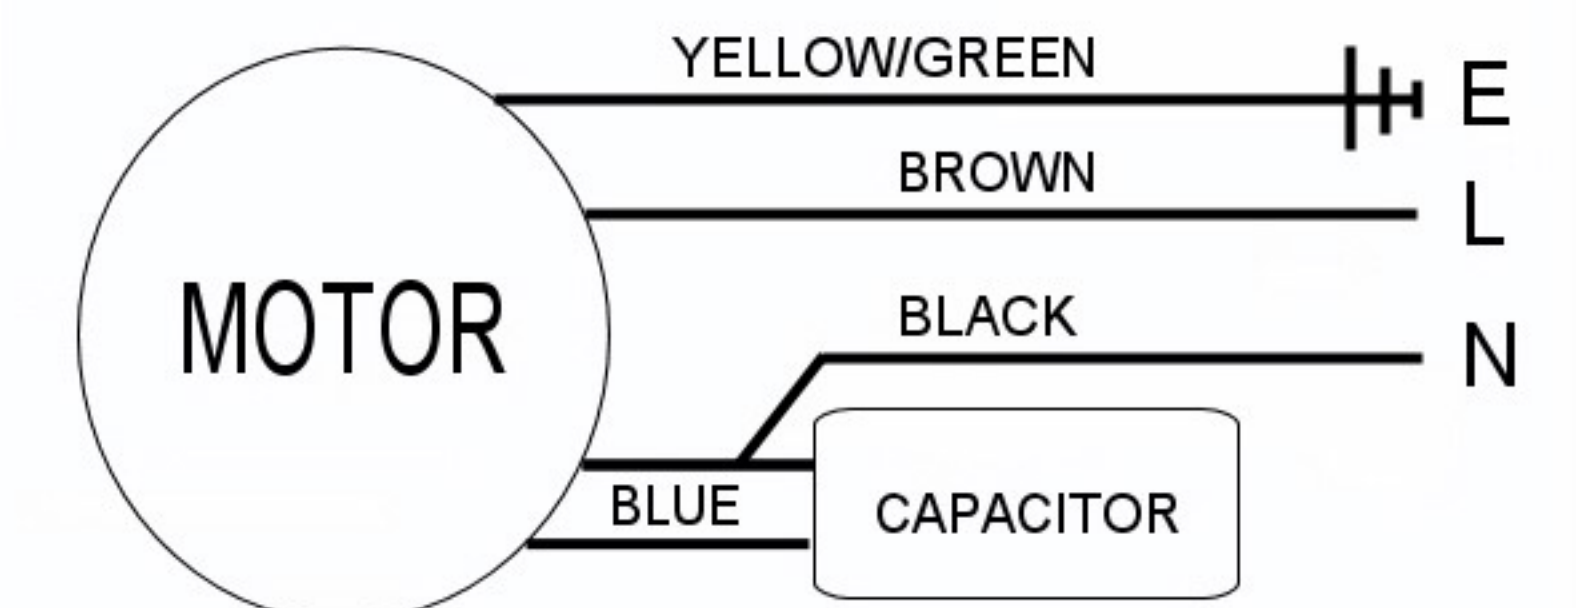

All measurements shown are in millimeters

SPECIFICATION					
Motor	PSC	Speed (RPM)	1580	Bearings	Ball
Voltage (V)	110	Motor Protection	Th. Prot	Weight (Kg)	6.0
Frequency (Hz)	60	Insulation Class	F	Air Volume (M <sup>3</sup> /h)	
Power In/Out (W)	250	Protection Class	IP54	Noise Level (dBA)	69/73
Current (A)	2.35	Temp. Range	-30 +60	Capacitor (MF)	24

**POLE STAR**  
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	<b>GMAF1-400B4-L-110V</b>
Projection	A4
Angle	Scale:
± 3°	Sheet: 1 of