



Airflow Direction
←

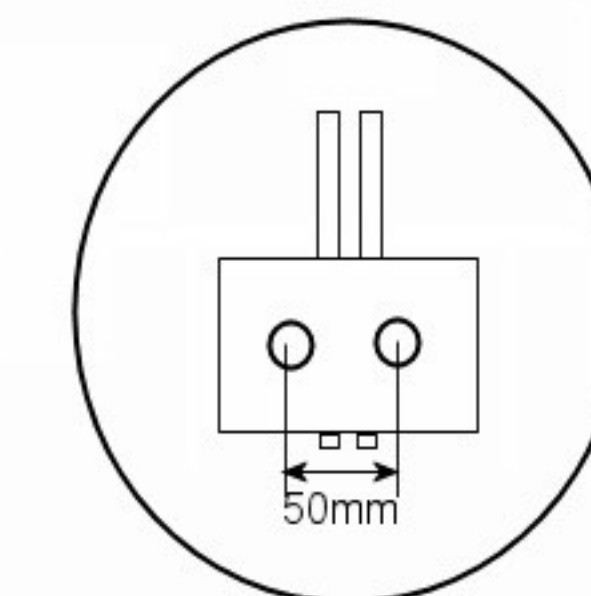

x2 bolt fixing on larger models

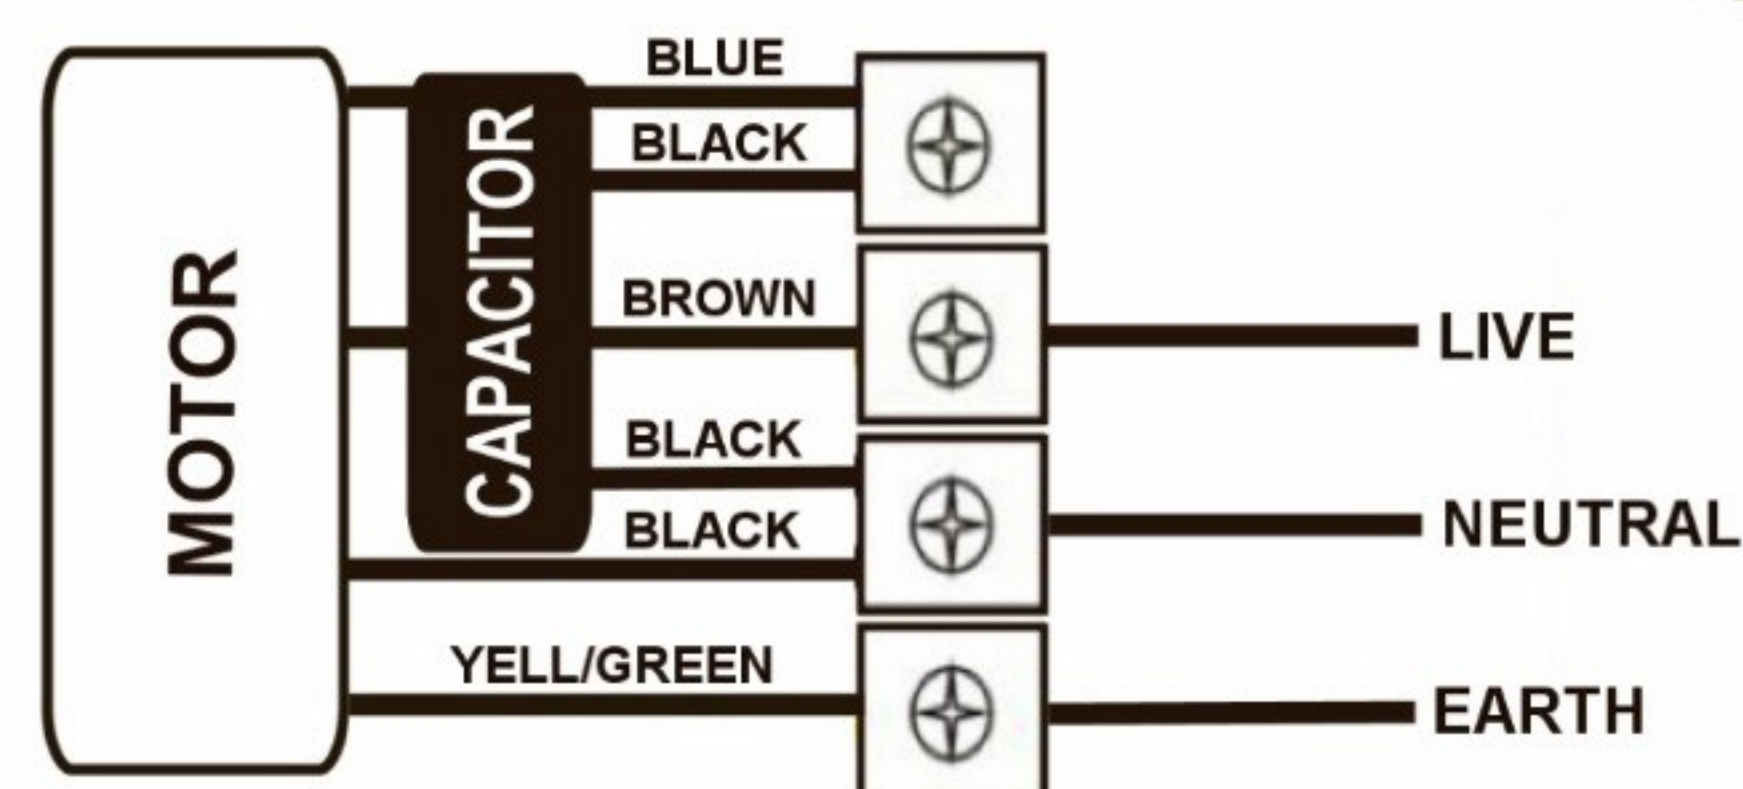

All measurements shown are in millimeters
Measurements shown have manufacturing tolerances of +/- 2mm

SPECIFICATION					
Motor	PSC	Speed (RPM)	930	Bearings	Ball
Voltage (V)	220/240	Motor Protection	Th. Prot	Weight (Kg)	15
Frequency (Hz)	50/60	Insulation Class	B	Air Volume (M³/h)	8800
Power In/Out (W)	540	Protection Class	IP54	Noise Level (dBA)	72
Current (A)	2.5	Temp. Range	-30 +60	Capacitor (Mf)	16

POLE STAR
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	
GMAV1-630S6-1	
Projection Angle	A4
± 3°	Scale:
	Sheet: 1 of