


Mounting holes 8x2  
 Ø 4.3+-0.3  
 (0.165")


\*Tapped screw  
 holed M5x0.8  
 available on request

Dual Speed -1/2 (High/Medium)

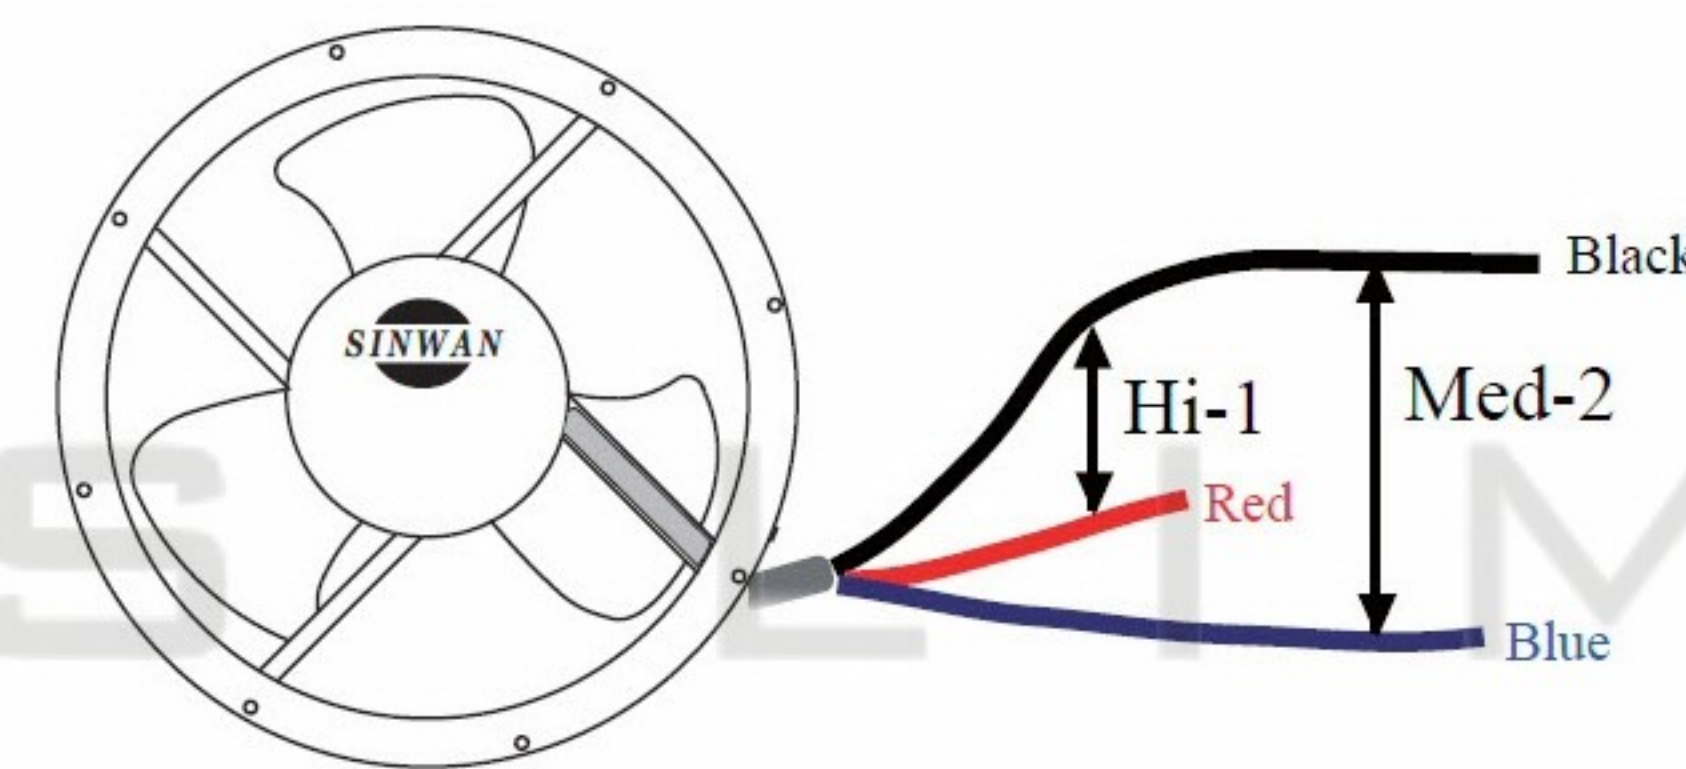

**Wire type**

- Black ----- Neutral wire
- Black + Red ----- High speed-1
- Black + Blue ----- Medium speed-2

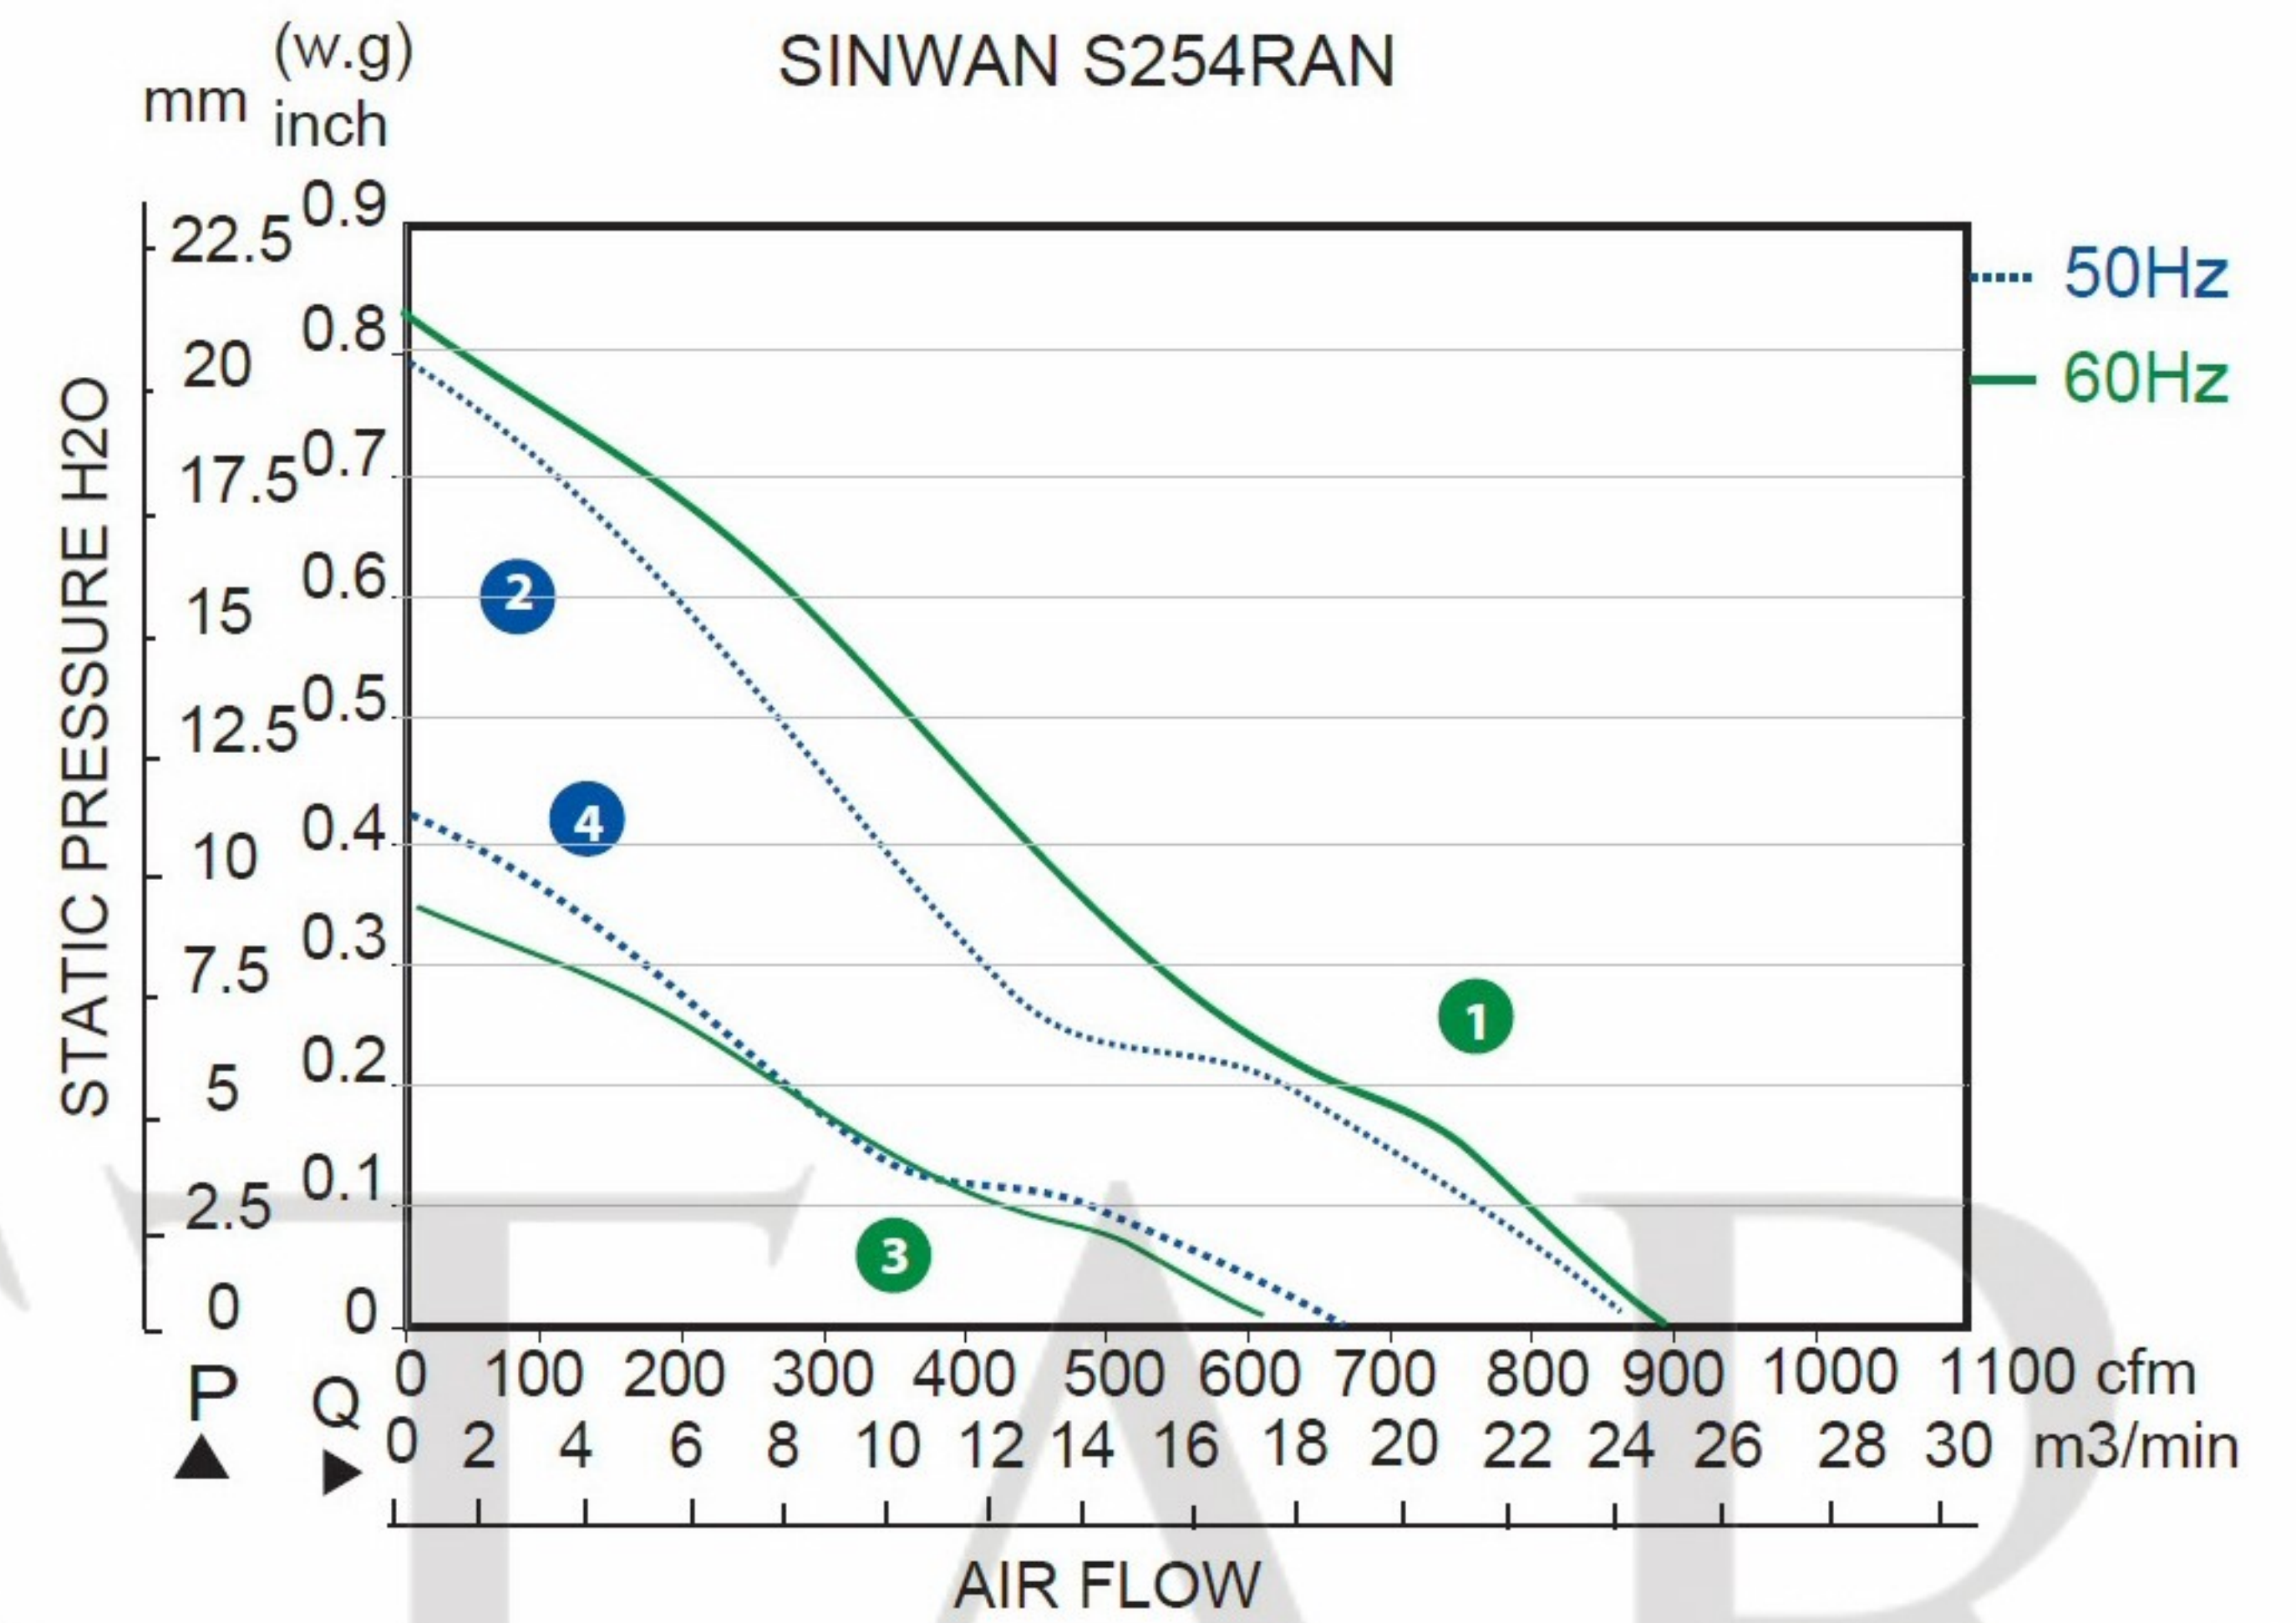

SPECIFICATION					
Motor	Cap. Ind.	Speed (RPM)	2600	Bearings	Ball
Voltage (V)	110	Motor Protection	TH.Prot.	Weight (Kg)	2.46
Frequency (Hz)	50/60	Insulation Class	B	Noise dB(A)	63
Power In/Out (W)	60/75(110v)	Protection Class	IP42	Max Airflow (cfm)	860/890
Curves - 110V	2/1	Curves - 80V	4/3	Max Static Pr. (Inch H2O)	0.79/0.83

**POLE STAR**  
 PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	PS25489BL-115V-1
Projection Angle	± 3°
Scale:	A4
Sheet:	1 of 1